

Retail-Pos 100 Thermal Receipt Printer

The Retail-Pos 100 Printer is distinctive
In its small size, but don't underestimate
It's abilities.



The Retail Pos 100 has Drop & Load Print making it easy to change rolls.



The Retail Pos 100 has a wide Thermal Receipt, up to 3" (80mm)




Retail-Pos 100
30% Smaller
Than Standard
Receipt Printer



Big on Style & Performance –
Small & Powerful

Key Features - At A Glance

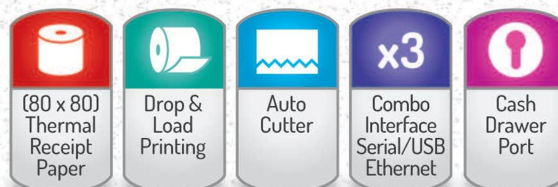

Retail-Pos 100

Thermal Receipt Printer




- 30% Smaller Than Standard Printer.
- Energy Star Certified Reduces Energy Costs & Carbon Footprint.
- Fast Speed of 250mm Per Sec.
- Full Sized 80 x 80 Thermal Roll.
- Triple Interface as Standard – Serial/Ethernet/USB.
- Jam Free Technology.
- Durable Ceramic Auto Cutter.
- Optional Splash Cover.
- Optional Kitchen Bell.

Features


- Triple Interface Standard – Serial + Ethernet + USB.
- Guillotine Style, Jam-Free Auto-Cutter.
- Black/Red or Black/Blue Two-Colour Printing Available on Appropriate Paper.
- Accepts 2-1/4" (58mm) or 3-1/8" (80mm) Thermal Paper Rolls.
- Stores/Prints User Defined Graphic Logos, Coupons or Advertising Messages.
- Stores Up to 255 Images (384) Kbytes in Non-Volatile Memory.
- Easy-to-Use Utilities Simplify Loading Images and Watermarks.
- Built-in Wall Mount Capability.
- Integrated Kitchen Bell Interface.

Retail-Pos 100 Specification

| | | |
|-----------------------|-----------------------|--|
| ITEMS | Printing Speed | Maximum 250mm/Sec. |
| | Resolution | 180DPI. |
| | Printing Width | Maximum 72mm. |
| PAPER | Loading | Drop-In Type. |
| | Dimension | 80mm (Maximum) x Ø83mm. |
| | Auto Cutter | Guillotine Type (Jam-Free). |
| MEMORY | PGM Memory | 2 Mbyte. |
| | Data Memory | 8 Mbyte. |
| | Data Buffer | 64KB |
| RELIABILITY | Mechanism (MCBF) | 70,000,000 Lines. |
| | TPH | 1 x 108 Pulse, 150Km. |
| | Auto Cutter | 1,500,000 Cut. |
| | Drivers | Windows Driver, OPOS Driver, Linux Driver, Mac Driver, Android SDK. |
| | Drawer Port Interface | 2 Ports (+24V). USB + RS-232 (RJ-45) + Ethernet (Standard), USB + Wi-Fi (Optional). |
| OPTIONS | Dimensions | 120(H) x 142(D) x 128(W)mm. |
| | Kitchen Bell | Yes. |
| | Splash Cover | Yes. |
| | Paper Partition | Yes (Default). |
| BARCODE | | UPC-A, UPC-E, EAN8, EAN13, Code 39, Code 93, Code 128, ITF, CODABAR, PDF417, QRCode. |
| DRIVERS | | WEPOS, POSReady2009, Windows XP Pro, Windows Vista, Windows 7 Pro, POSReady 7, Windows 8 Pro, Industry 8, OPOS, JPOS, Linux Cups, Mac (OSX 10.8), Android SDK. |
| SUPPLY VOLTAGE | Input Voltage | 100-240V AC. |
| | Frequency | 50-60 Hz. |
| | Output Voltage | 24V DC. |

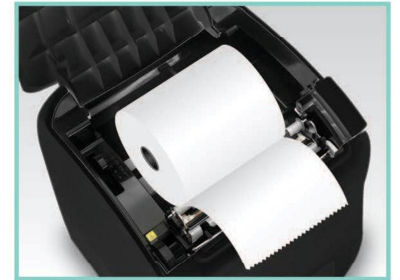


The Retail Pos 100 has 'Drop & Load' print making it easy change rolls.

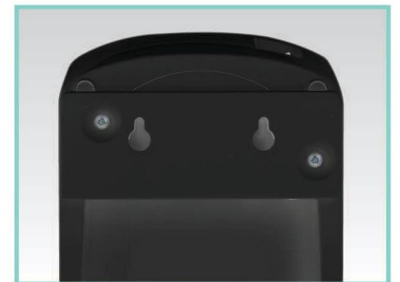

The Retail Pos 100 has a wall mount Option, ideal if space is tight.

Ports and Connectivity

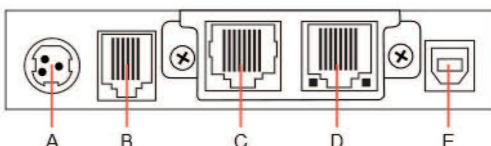

- A: DC 24V Power-In
- B: Cash Drawer
- C: Serial
- D: Ethernet
- E: USB



YOUR LOCAL DEALER IS



POS Solutions Pvt Ltd.

306, 3rd Floor, Sanjar Enclave, Opp. Milap PVR Cinema, S.V. Road, Kandivali (W), Mumbai -400 067. India. Email: sales@pos-india.com, Web: www.pos-india.com

Mumbai | Delhi | Chennai | Bengaluru | Hyderabad | Cochin | Kolkata | Pune | Coimbatore | Patna